

AuraLux®

StudioLED FRESNEL.

The Manual ZOOM 5.5"
Fresnel with a beautiful
variable beam light
and high TLCI* for
professional television
and production lighting.

Specially created for cinematographers, DP's, television, video and photography producers and filmmakers alike, this powerful 110 W 5.5" Fresnel, features a variable beam, with pure white light blended with our unique NEBULA® Diffusion Chamber Technology.

The luminaire emits a light beam that produces defined shadows and beautiful skin and stage color rendition with a CRI 90+.

It features HALODIM® our unique stepless 0-100% no color change dimming firmware.

*Television Lighting Consistency Index (TLCI) is a new evaluation standard for studio lights which measures the quality of a light source as it would appear on camera on a scale from 0 to 100.

FLUOTEC.  WE LIGHT!

www.fluotec.net

info@fluotec.net

Tel.: 1 (877) 556-5554




Specially created for cinematographers, DP's, television, video and photography producers and filmmakers alike, this powerful 110 W 5.5" Fresnel, features a variable beam, with pure white light blended with our unique NEBULA® Diffusion Chamber Technology.

Model	AuraLux Tungsten	AuraLux Daylight
Code	G6LED116	G6LED117
Operation	100-240V - 50/60Hz	100-240V - 50/60Hz
Weight lb/kg	11.26/5.11	11.26/5.11
Electrical draw	1.16A (110 W) @120V	1.16A (110 W) @120V
Color temperature	3200K	5600K
CRI	+90	+90
Remote dimming control	Via DMX 0% - 100%	Via DMX 0% - 100%
Local dimming control	Digital Display 0% - 100%	Digital Display 0% - 100%
Zoom control	Manual from 10° - 40°	Manual from 10° - 40°

Technical specifications

- 10° to 40° Spot to Flood adjustment.
- Available in 2 color temperatures: Tungsten 3200K or Daylight 5600K.
- 50,000 hours long Life LED.
- Powerful LED engine with very low 110 W electrical draw.
- World operation: 100 - 240VAC - 50/60Hz VAC.
- Silent active fan cooling.
- Exclusive NEBULA® Diffusion Chamber Technology for a beautiful high CRI variable beam light for defined shadows & color rendition.

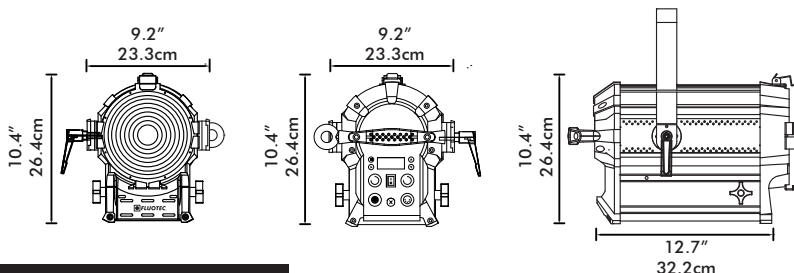


Photometric Data


1.83 m (6.00 ft) 2.74 m (9.00 ft) 3.66 m (12.00 ft)

Illuminance E
Foot-Candles/lux

AuraLux® Daylight

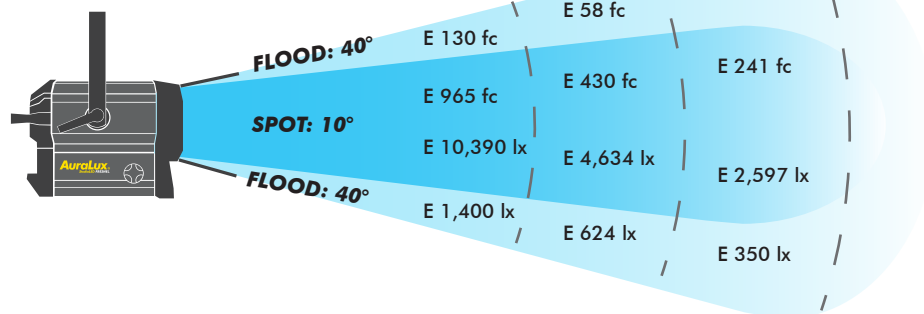


AuraLux® Tungsten

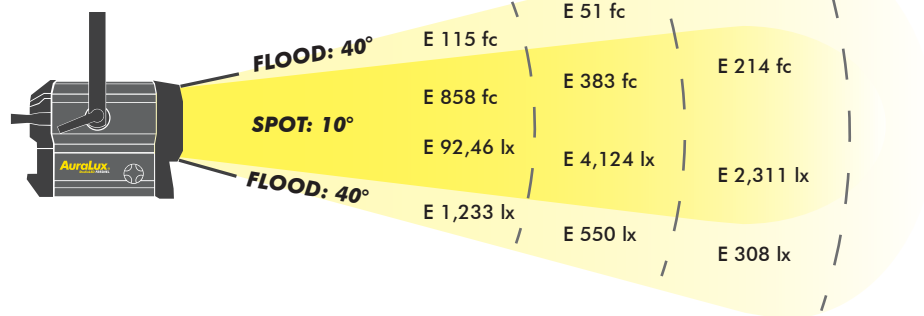

Included accessories



Barndoors - 8 Blades
G6LED120



Filter Holder
G6LED097



C-Clamp
G6FLT262



2 Safety Cable
G6FLT059



Locking AC cord
POWERCON 16 ft (4.8 m)
G6LED125