

# AuraLux 100®

Tungsten StudioLED FRESNEL®

Pure white lighting  
precision instrument  
with Pole Operated  
option.


The new **FLUOTEC** AuraLux 100® is a 5.5" StudioLED FRESNEL that delivers 60% more Pure White Light with high color rendering CRI & TLCI indexes.

The AuraLux 100® StudioLED FRESNEL features new technological advancements:

- One source light
- Powerful new LED COB Chip on Board that delivers 60% more light output
- Precise FRESNEL lens
- Very quiet operation
- Suitable for studio environments
- Accurate light control
- Low weight
- Pole operation available




[www.fluotec.net](http://www.fluotec.net) • [info@fluotec.net](mailto:info@fluotec.net)  
Tel.: 1 (877) 556 5554







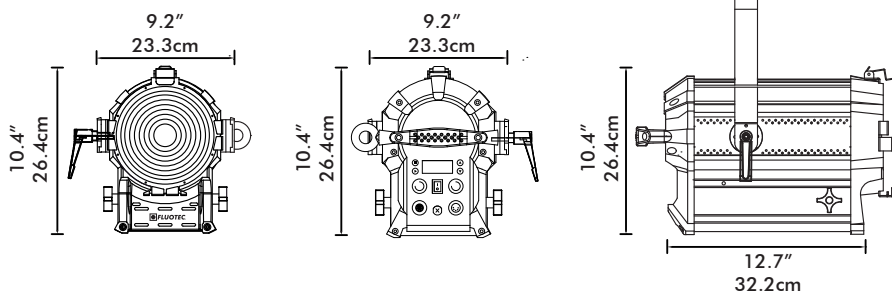

Model	AuraLux 100® Tungsten
Code	G6LED171
Code with Pole Operated	G6LED180
Operation	90-240V - 50/60 Hz
Weight lb/kg	13.6/6.2
Electrical draw	71 A (85 W) @120VAC
Color temperature	3100K
CRI	+92
Remote dimming control	Via DMX 0% - 100%
Local dimming control	Digital Display 0% - 100%
Zoom control	Manual from 9° - 45°

## Technical specifications

- 9° to 45° Spot to Flood adjustment
- Available in Tungsten 3100K
- One source light
- Powerful new LED COB Chip on Board that delivers 60% more light output
- Precise FRESNEL lens
- Very quiet operation
- Suitable for studio environments
- Accurate light control
- Low weight
- Pole operation available



## Included accessories

-  Barndoors - 8 Blades  
G6LED120
-  Gel Frame  
G6LED097
-  C-Clamp  
G6FLT262
-  Safety Cable (2x)  
G6FLT059
-  Stand Mount Spigot  
G6FLT057
-  AC cord with POWERCON  
Connector 16 ft (4.82 m)  
G6CNT154

## Photometric Data

1.83 m (6.00 ft)      2.74 m (9.00 ft)      3.66 m (12.00 ft)

**Illuminance E**  
Foot-Candles/lux

## AuraLux 100® Tungsten

