

CineLight

Production®

Tunable **SoftLIGHT** LED PANEL®

A new powerful production soft lighting system of 4 ft, 2 ft and 1 ft Tunable **SoftLIGHT** LED PANELS®.

Specially designed solutions with high TLCI* for Motion Pictures and Television Studios.

CineLight 30.

CineLight 120.

CineLight 60.

*Television Lighting Consistency Index (TLCI) is a new evaluation standard for studio lights which measures the quality of a light source as it would appear on camera on a scale from 0 to 100.

FLUOTEC. WE LIGHT!

www.fluotec.net

info@fluotec.net



Tel.: 1 (877) 556-5554



| Model | | CineLight Production 30® Tunable |
|--|------------------------------|-------------------------------------|
| Code AC only without Battery Mount | | G6LCNT102 |
| Code V-Mount Battery Mount | | G6LCNT103 |
| Code AB-Mount Battery Mount | | G6LCNT104 |
| Operation | 90-240V - 50/60Hz | |
| Weight lb/kg | 10.00/4.5 | |
| Electrical draw | .48 A (57 W) @120V | |
| Remote variable CCT | 2700K - 6500K | |
| CRI | +95 @4600K | |
| Remote dimming control | Via DMX 0% - 100% | |
| Local dimming control | Digital Display 0% - 100% | |

Technical Specifications

- Manual and/or DMX control.
- 8 Preset memories for color temperature and custom configurations are allowed between 2700-6600K.
- A very high efficiency Broadcast & Cinema luminaire with white light LEDs controlled by our exclusive software-hardware drivers.
- Constant luminous output for the whole range (2700-6500K) of correlated color temperatures CCT is achieved with our proprietary designed calibration curves.
- Stepless 0-100% HALODIM® control dimming with 12-bit resolution, with calculated curves specially designed for the human eye, allowing a smooth dimming response and minimum color shift.
- The DMX control software automatically assigns 2 channels, the first for dimming and the second for color temperature.




| Photometric Data | Distance | 1.83 m (6.00 ft) | 2.74 m (9.00 ft) | 3.66 m (12.00 ft) |
|------------------|----------|---------------------|---------------------|----------------------|
|------------------|----------|---------------------|---------------------|----------------------|

Illuminance E Foot-Candles/lux

CineLight Production 30® Neutral White



CineLight Production 30® Cool White

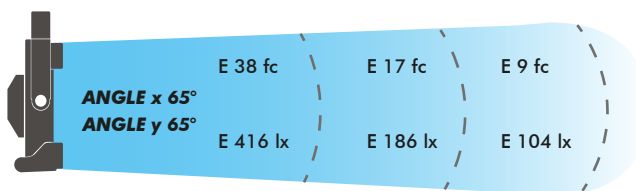


CineLight Production 30® Warm White




Accessories



4 Leaf Barndoors Set
NOT INCLUDED



Filter Holder
INCLUDED



50° Egg Crate
INCLUDED



Spigot Mini Universal
INCLUDED




Locking AC cord
POWERCON 16 ft (4.8 m)
G6LED125
INCLUDED

| Model | CineLight Production 60® Tunable |
|------------------------|----------------------------------|
| Code | G6LCNT101 |
| Operation | 90-240V - 50/60Hz |
| Weight lb/kg | 15.43/7.00 |
| Electrical draw | 0.91A (109 W) @120V |
| Remote variable CCT | 2700K - 6500K and 8 presets |
| CRI | +95 @4600K |
| Remote dimming control | Via DMX 0% - 100% |
| Local dimming control | Digital Display 0% - 100% |

Technical Specifications


- Manual and/or DMX control.
- 8 Preset memories for color temperature and custom configurations are allowed between 2700-6600K.
- A very high efficiency Broadcast & Cinema luminaire with white light LEDs controlled by our exclusive software-hardware drivers.
- Constant luminous output for the whole range (2700-6500K) of correlated color temperatures CCT is achieved with our proprietary designed calibration curves.
- Stepless 0-100% HALODIM® control dimming with 12-bit resolution, with calculated curves specially designed for the human eye, allowing a smooth dimming response and minimum color shift.
- The DMX control software automatically assigns 2 channels, the first for dimming and the second for color temperature.

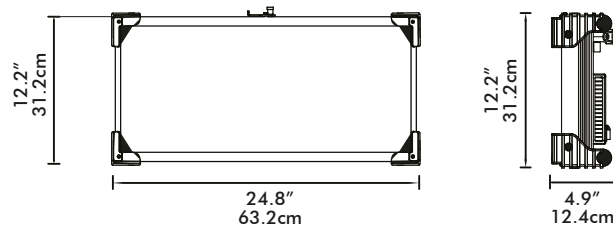


| Photometric Data | Distance | 1.83m (6.00ft) | 2.74m (9.00ft) | 3.66m (12.00ft) |
|------------------|----------|----------------|----------------|-----------------|
|------------------|----------|----------------|----------------|-----------------|

Illuminance E Foot-Candles/lux

CineLight Production 60® Neutral White

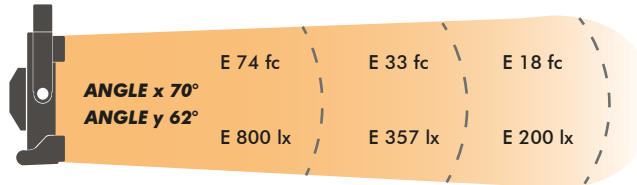

CineLight Production 60® Cool White

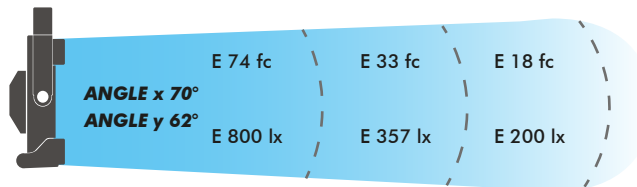


CineLight Production 60® Warm White




Included accessories



4 Leaf Barndoors Set
G6CNT142



Filter Holder
G6CNT121



50° Egg Crate
C6CNT131




Locking AC cord
POWERCON 16 ft (4.8 m)
G6LED125

| Model | CineLight Production 120® Tunable |
|------------------------|-----------------------------------|
| Code | G6LCNT100 |
| Operation | 90-240V - 50/60Hz |
| Weight lb/kg | 21.5/9.7 |
| Electrical draw | 1.79A (213 W) @120V |
| Remote variable CCT | 2700K - 6500K and 8 presets |
| CRI | +95 @4600K |
| Remote dimming control | Via DMX 0% - 100% |
| Local dimming control | Digital Display 0% - 100% |

Technical Specifications


- Manual and/or DMX control.
- 8 Preset memories for color temperature and custom configurations are allowed between 2700-6600K.
- A very high efficiency Broadcast & Cinema luminaire with white light LEDs controlled by our exclusive software-hardware drivers.
- Constant luminous output for the whole range (2700-6500K) of correlated color temperatures CCT is achieved with our proprietary designed calibration curves.
- Stepless 0-100% HALODIM® control dimming with 12-bit resolution, with calculated curves specially designed for the human eye, allowing a smooth dimming response and minimum color shift.
- The DMX control software automatically assigns 2 channels, the first for dimming and the second for color temperature.

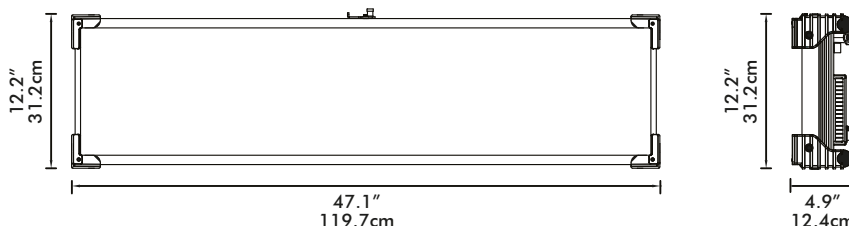


| Photometric Data | Distance | 1.83m (6.00ft) | 2.74m (9.00ft) | 3.66m (12.00ft) |
|------------------|----------|----------------|----------------|-----------------|
|------------------|----------|----------------|----------------|-----------------|

Illuminance E Foot-Candles/lux


CineLight Production 120® Neutral White

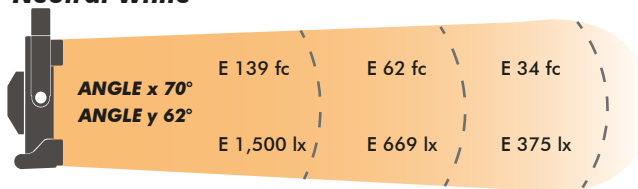

CineLight Production 120® Cool White

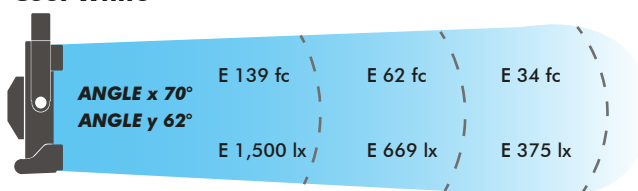


CineLight Production 120® Warm White

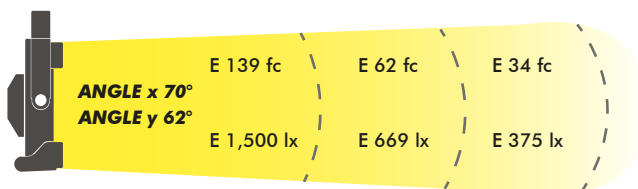


Included accessories



4 Leaf Barndoors Set
G6CNT141



Filter Holder
G6CNT121



50° Egg Crate
G6CNT131



Locking AC cord
POWERCON 16 ft (4.8 m)
G6LED125