

VegaLux®

StudioLED FRESNEL



VegaLux 200
StudioLED FRESNEL



VegaLux 300
StudioLED FRESNEL



VegaLux 500
StudioLED FRESNEL

FLUOTEC  **WE LIGHT!**

www.fluotec.net

info@fluotec.net


Tel.: 1 (877) 556-5554



Model	VegaLux 200® Tungsten	VegaLux 200® Daylight
Code	G6LED118	G6LED119
Operation	90-240V - 50/60Hz	90-240V - 50/60Hz
Weight lb/kg	14.00/6.60	14.00/6.60
Electrical draw	1.48A (185 W) @120V	1.48A (185 W) @120V
Color temperature	3200K	5600K
CRI	+90	+90
Remote dimming control	Via DMX 0% - 100%	Via DMX 0% - 100%
Local dimming control	Digital Display 0% - 100%	Digital Display 0% - 100%
Zoom control	Motorized Local & DMX from 10° - 40°	Motorized Local & DMX from 10° - 40°

Technical specifications


- DMX Dimmable Motorized Zoom 10° to 40° Spot to Flood adjustment.
- Local and DMX Digital Dimmer 0% - 100%.
- Available in 2 color temperatures: Tungsten 3200K or Daylight 5600K.
- 50,000 hours long Life LED.
- Powerful LED engine with very low 185 W electrical draw.
- World operation: 90 - 240VAC - 50/60Hz VAC.
- HALODIM® Stepless CCT & Dimming Technology.
- Silent active fan cooling.
- Exclusive NEBULA® Diffusion Chamber Technology for a beautiful high CRI and TLCI* variable beam light for defined shadows & color rendition.

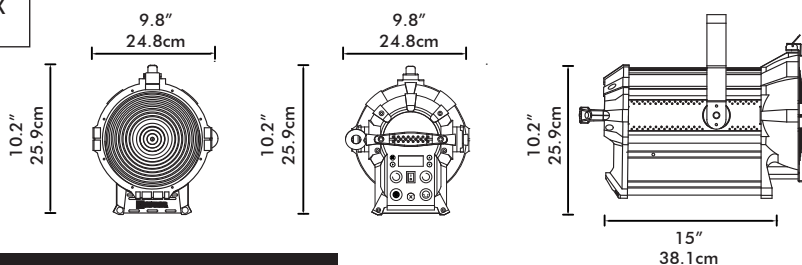


Photometric Data	1.83m (6.00ft)	2.74m (9.00ft)	3.66m (12.00ft)
------------------	-------------------	-------------------	--------------------

Illuminance E Foot-Candles/lux

VegaLux 200® Daylight

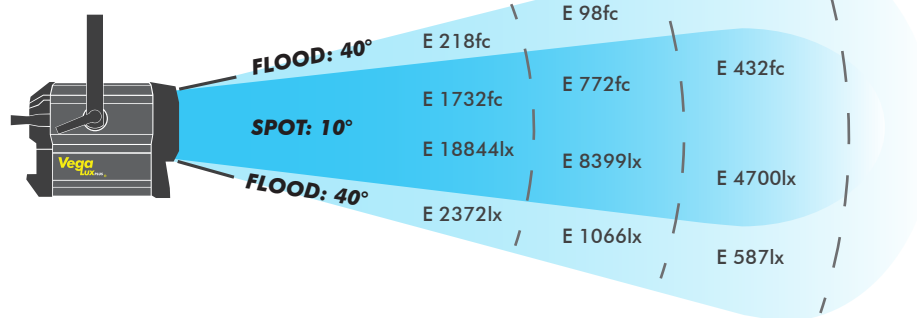

VegaLux 200® Tungsten

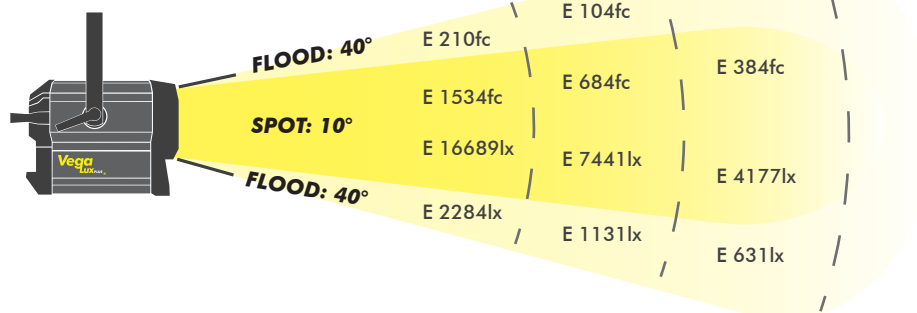


Included accessories

- Barndoors - 8 Blades
G6LED121
- Filter Holder
G6LED096
- C-Clamp
G6FLT262
- Safety Cable
G6FLT059
- Locking AC cord
POWERCON 16 ft (4.8 m)
G6LED125

Model	VegaLux 300® Tunable
Code	G6LED126
Operation	90 - 240V - 50/60Hz
Weight lb/kg	16.5/7.5
Electrical draw	2.81A (338W) @120V
Remote variable CCT	3000K - 5800K
CRI	+90
Remote dimming control	Via DMX 0% - 100%
Local dimming control	Digital Display 0% - 100%
Zoom control	Motorized Local & DMX from 15° - 50°

Technical specifications


- DMX Dimmable Motorized Zoom 15° to 50° Spot to Flood adjustment.
- Local and DMX Digital Dimmer 0% - 100%.
- Powerful LED engine with 338W electrical draw.
- Operation Voltage: 90 - 240V - 50/60Hz.
- HALODIM® Tunable® Stepless CCT & Dimming Technology.
- Exclusive NEBULA® Diffusion Chamber Technology for a beautiful high CRI and TLCI* variable beam light for defined shadows & color rendition.

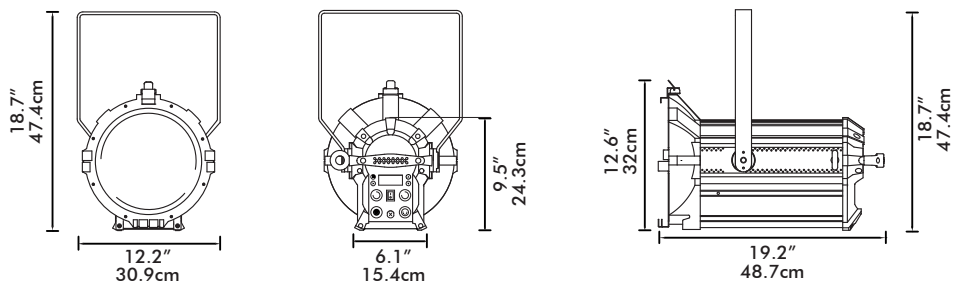


Photometric Data	Distance	1.83m (6.00ft)	2.74m (9.00ft)	3.66m (12.00ft)
------------------	----------	----------------	----------------	-----------------

Illuminance E Foot-Candles/lux


VegaLux 300 Neutral White

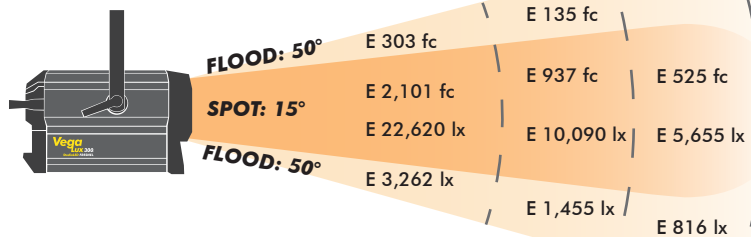

VegaLux 300 Cool White

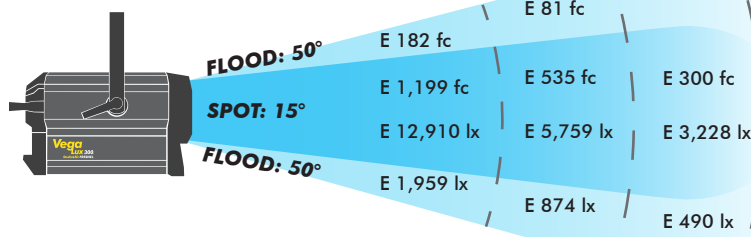

VegaLux 300 Warm White

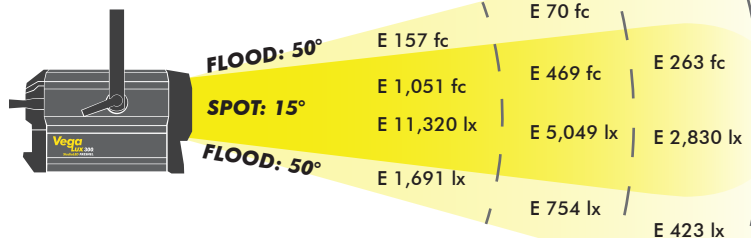


Included accessories

- Barndoors - 8 Blades G6LED127
- Filter Holder G6LED128
- C-Clamp G6FLT262
- Safety Cable G6FLT059
- Locking AC cord POWERCON 16 ft (4.8 m) G6LED125

Model	VegaLux 500® Tungsten	VegaLux 500® Daylight
Code	G6LED136	G6LED135
Operation	90 - 240V - 50/60Hz	90 - 240V - 50/60Hz
Weight lb/kg	40.7/18.5	40.7/18.5
Electrical draw	4.3A (514 W) @120V	4.3A (514 W) @120V
Remote variable CCT	3100K	5500K
CRI	+90	+90
Remote dimming control	Via DMX 0% - 100%	Via DMX 0% - 100%
Local dimming control	Display Digital 0% - 100%	Display Digital 0% - 100%
Zoom control	Manual de 9° - 44°	Manual de 9° - 44°

Technical specifications

- Manual Zoom 10° to 44° Spot to Flood adjustment.
- Local and DMX Digital Dimmer 0% - 100%.
- Available in 2 color temperatures: Tungsten 3100K or Daylight 5500K.
- 50,000 hours long Life LED.
- Powerful LED engine with 514 W electrical draw.
- Operation Voltage: 90 - 240V - 50/60Hz.
- HALODIM® Stepless CCT & Dimming Technology.
- Exclusive NEBULA® Diffusion Chamber Technology for a beautiful high CRI and TLCI* variable beam light for defined shadows & color rendition.

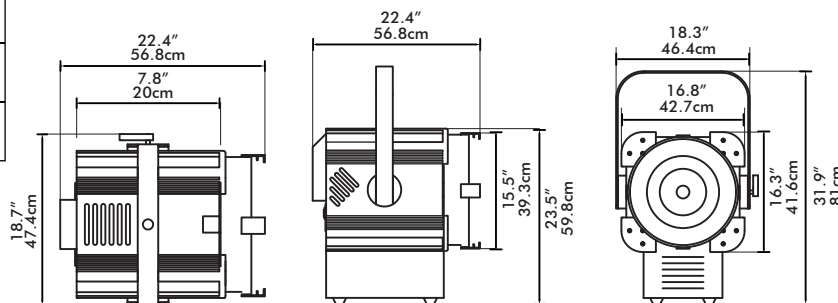

Photometric Data

Distance

3.00 m
(9.84 ft)


5.00 m
(16.4 ft)

10.00 m
(32.8 ft)


Illuminance E Foot-Candles/lux



VegaLux 500® Daylight

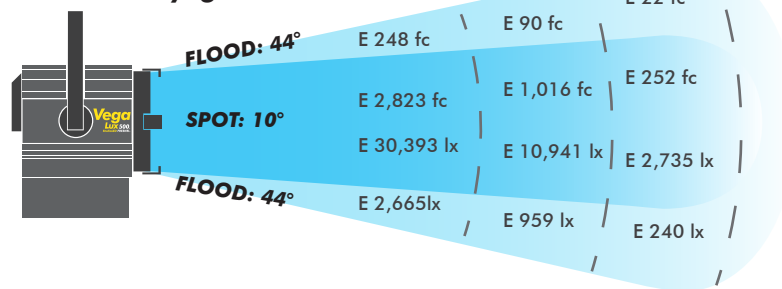


VegaLux 500® Tungsten

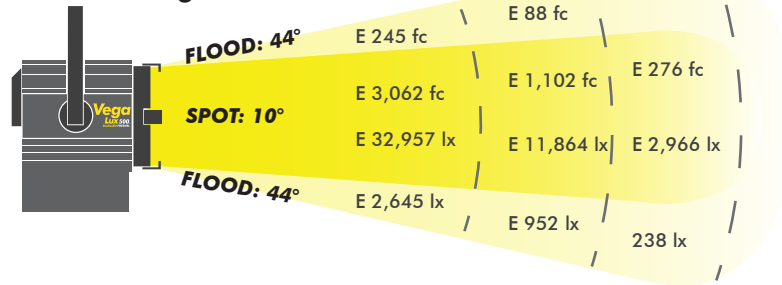

Included accessories



Cortadora - 8 Hojas
G6LED137



Portafiltro
G6LED138



C-Clamp
G6FLT262



Cable de Seguridad
G6FLT059



Cable POWERCON
AC de 16 ft (4.8 m)
G6LED125