

VegaLux®

StudioLED Fresnel Motorized Zoom

FLUOTEC
...WE LIGHT!



VegaLux 300.
High-Performance StudioLED Fresnel Motorized Zoom



VegaLux 200 UHP
Ultra High-Performance StudioLED Fresnel Motorized Zoom




VegaLux 200 HP
High-Performance StudioLED Fresnel Motorized Zoom

The High-Performance LED fresnels with a variable beam of pure white light for professional television and production lighting.

Model	VegaLux 200® HP Tungsten	VegaLux 200® HP Daylight
Code	G6LED173	G6LED174
Operation	90-240V - 50/60Hz	90-240V - 50/60Hz
Weight lb/kg	15.43/7.0	16.04/7.28
Electrical draw	1.64A (197W) @120VAC	1.64A (197W) @120VAC
Color temperature	3100K	5700K
CRI	>93	>93
Remote dimming control	Via DMX 0% - 100%	Via DMX 0% - 100%
Local dimming control	Digital Display 0% - 100%	Digital Display 0% - 100%
Zoom control	Motorized Local & DMX from 12° - 52°	Motorized Local & DMX from 12° - 52°

Technical specifications

- DMX Dimmable Motorized Zoom 12° to 52° Spot to Flood adjustment
- Local and DMX Digital Dimmer 0% - 100%
- Available in 2 color temperatures: Tungsten 3100K or Daylight 5700K
- 50,000 hours long Life LED
- Powerful LED engine with very low 197W electrical draw
- 90 - 240VAC - 50/60Hz VAC
- HALODIM® Steplless CCT & Dimming Technology
- Quiet operation
- Exclusive NEBULA® Diffusion Chamber for a beautiful high CRI and TLCI* variable beam light for defined shadows & color rendition

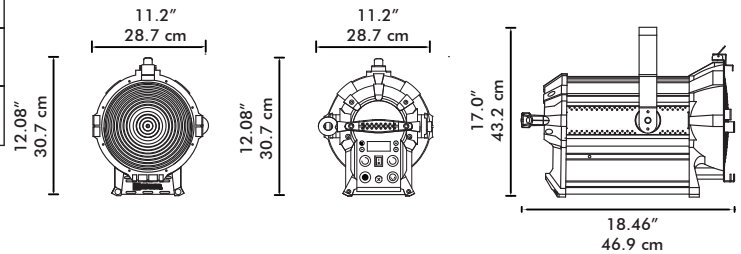


Photometric Data

1.83 m (6.00 ft) 2.74 m (9.00 ft) 3.66 m (12.00 ft)

Illuminance E Foot-Candles/lux

VegaLux 200® HP Daylight

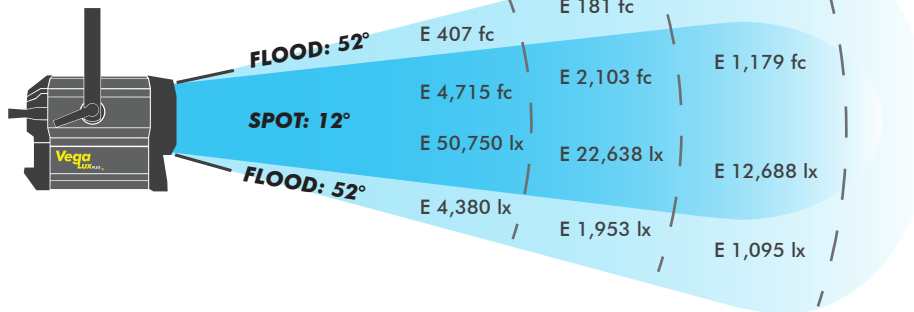

VegaLux 200® HP Tungsten



Included accessories



Barndoor-8 Blades
G6LED121




Filter Holder
G6LED096



16 ft AC Cable POWERCON
Edison U-Ground conector
G6PLT041



Stand Fitting 5/8"
G6FLT057



Safety Cable
G6FLT059



C-Clamp
G6FLT262




The Ultra High-Performance LED fresnels with a variable beam of pure white light for professional television and production lighting.


Model	VegaLux 200 [®] UHP Tungsten	VegaLux 200 [®] UHP Daylight
Code	G6LED175	G6LED176
Operation	90-240V - 50/60Hz	90-240V - 50/60Hz
Weight lb/kg	15.87/7.2	15.87/7.2
Electrical draw	1.64A (197W) @120VAC	1.64A (197W) @120VAC
Color temperature	3100K	5700K
CRI	>93	>93
Remote dimming control	Via DMX 0% - 100%	Via DMX 0% - 100%
Local dimming control	Digital Display 0% - 100%	Digital Display 0% - 100%
Zoom control	Motorized Local & DMX from 12° - 52°	Motorized Local & DMX from 12° - 52°

Technical specifications

- DMX Dimmable Motorized Zoom 12° to 52° Spot to Flood adjustment
- Local and DMX Digital Dimmer 0% - 100%
- Available in 2 color temperatures: Tungsten 3100K or Daylight 5700K
- 50,000 hours long Life LED
- Powerful LED engine with very low 197W electrical draw
- 90 - 240VAC - 50/60Hz VAC
- HALODIM[®] Stepless CCT & Dimming Technology
- Quiet operation
- Exclusive NEBULA[®] Diffusion Chamber for a beautiful high CRI and TLCI* variable beam light for defined shadows & color rendition

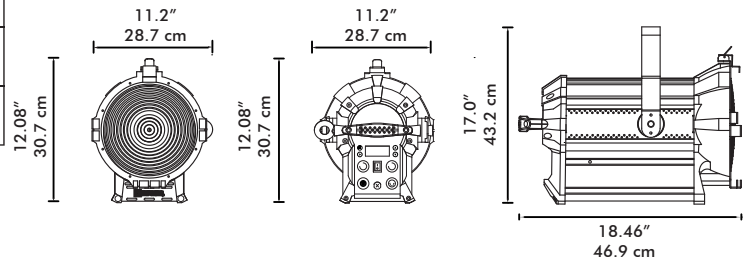

Photometric Data	1.83 m (6.00 ft)	2.74 m (9.00 ft)	3.66 m (12.00 ft)
------------------	---------------------	---------------------	----------------------

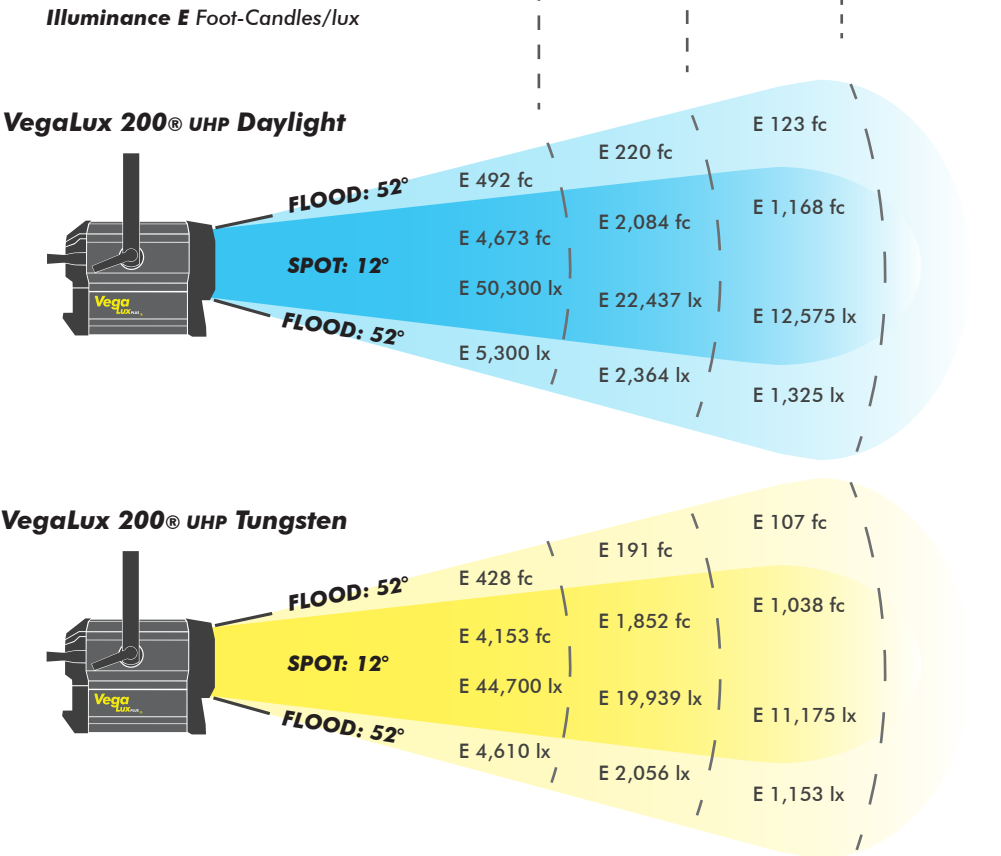

Included accessories

- Barn door-8 Blades G6LED121
- Filter Holder G6LED096
- 16 ft AC Cable POWERCON Edison U-Ground connector G6PLT041
- Stand Fitting 5/8" G6FLT057
- Safety Cable G6FLT059
- C-Clamp G6FLT262

Photometric measurement of beam angle at 50% peak, were made at center value with a spectro photometer Minolta CL-500A in a non reflective dark chamber. Light was projected on a neutral gray. Manufacturing Design & Technical Specifications are subject to change without notice.

VegaLux 300®

High-Performance **StudioLED** Fresnel Motorized Zoom

High performance LED fresnels with
a variable beam of pure white light.



High Performance
High CRI/TLCI indexes > 93
80%-120% more light!

VegaLux 300® is a motorized zoom DMX tunable neutral white light LED Fresnel that adds now two new models in dedicated versions of Tungsten and Daylight Color Temperatures.



www.fluotec.net
info@fluotec.net



FLUOTEC
...WE LIGHT!

Motorized zoom DMX tunable neutral white light LED Fresnel that adds now two new models in dedicated versions of Tungsten and Daylight Color Temperatures.

Model	VegaLux 300® Tungsten	VegaLux 300® Daylight	VegaLux 300® Tunable
Code	G6LED177	G6LED178	G6LED126
Operation	90-240V - 50/60Hz	90-240V - 50/60Hz	90 - 240V - 50/60Hz
Weight lb/kg	26.23/11.9	26.23/11.9	26.23/11.9
Electrical draw	1.64A (197W) @120VAC	1.64A (197W) @120VAC	2.81A (338W) @120V
Color temperature	3100K	5700K	3000K - 5800K
CRI	>93	>93	>90
Remote dimming control	Via DMX 0% - 100%	Via DMX 0% - 100%	Via DMX 0% - 100%
Local dimming control	Digital Display 0% - 100%	Digital Display 0% - 100%	Digital Display 0% - 100%
Zoom control	Motorized Local & DMX from 10° - 47°	Motorized Local & DMX from 10° - 47°	Motorized Local & DMX from 15° - 50°

Technical specifications

- Local and DMX Digital Dimmer 0%- 100%
- 50,000 hours long Life LED
- HALODIM® Stepless CCT & Dimming Technology
- Quiet operation

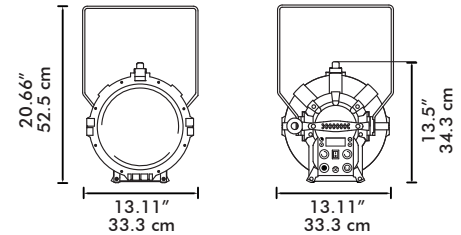

Photometric Data	Distance	1.83 m (6.00 ft)	2.74 m (9.00 ft)	3.66 m (12.00 ft)
------------------	----------	---------------------	---------------------	----------------------




Illuminance E Foot-Candles/lux


VegaLux 300® Neutral White




VegaLux 300® Daylight

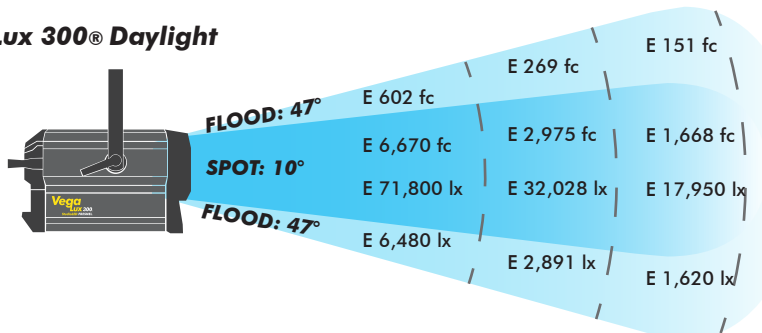


VegaLux 300® Tungsten

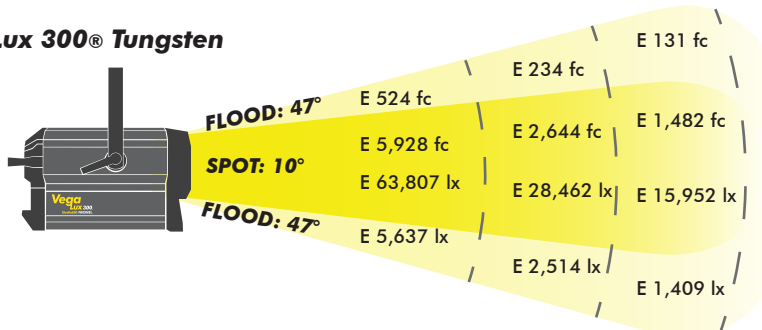

Included accessories



Barndoor-8 Blades
G6LED127




Filter Holder
G6LED128



16 ft AC Cable POWERCON
Edison U-Ground connector
G6PLT041



Stand Fitting 5/8"
G6FLT057



Safety Cable
G6FLT059



C-Clamp
G6FLT262