
### FLUOTEC



...WE LIGHT!

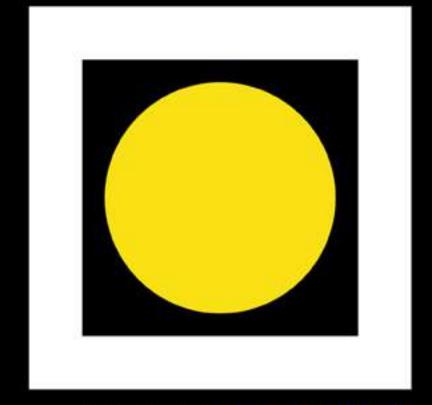

#### **About Us**

**FLUOTEC**® is a leading manufacturer of LED & professional lighting fixtures for television studios, motion pictures, video & photography. **FLUOTEC**® Studio Lights, Soft Lights, & Location Lights includes Spot Lights FRESNELS & **StudioLED PANELS**® that deliver powerful and beautiful light that bring tri-dimensional atmospheres to the scenes and images, either in photography, in television, or in motion picture productions.

FLUOTEC® has been present in the international markets for 20 years, a has considerable experience in lighting technology.

FLUOTEC® presents to the television lighting markets, new, powerful, high quality, innovative and efficient lighting FRESNELS.

FRESNELS from **FLUOTEC**® have no color shift between the center and the edge of the beam, the **NEBULA**® technology, unique to **FLUOTEC**® **StudioLED PANELS**®, emits powerful, high quality, full spectrum white light beams. This produces even light, well-defined shadows, desirable skin tones and accurate and vibrant stage and costumes color rendition.





#### **Special Projects**

At **FLUOTEC**® we are open to special projects. That is, if any of our line products do not meet the specific needs of a customer, there is always the possibility of developing a new product.

#### **Strategic Alliances**


In **FLUOTEC**® besides working our own developments, we have also established strategic alliances that not only allow us to reach more places in the undo but also generate new products that meet the needs of some markets and specific users.






#### **Awards & Nominations**

The commitment and energy of those who work at **FLUOTEC**® can be summed up in obtaining the following prizes and nominations:

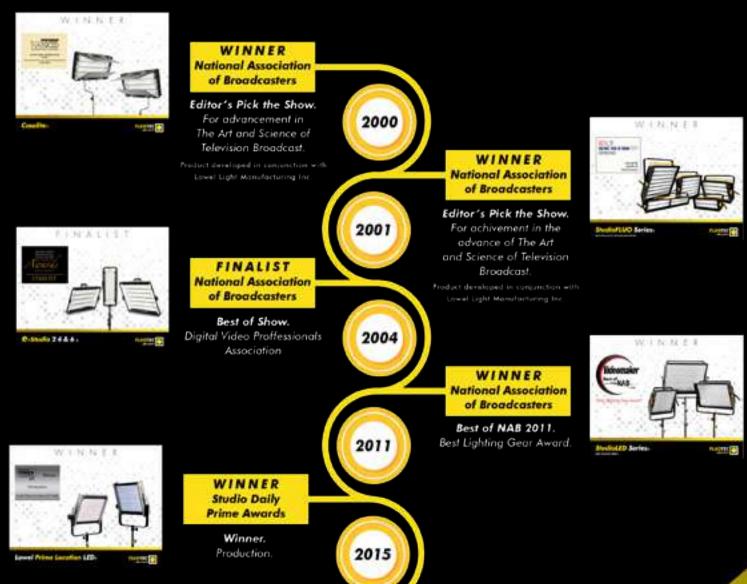





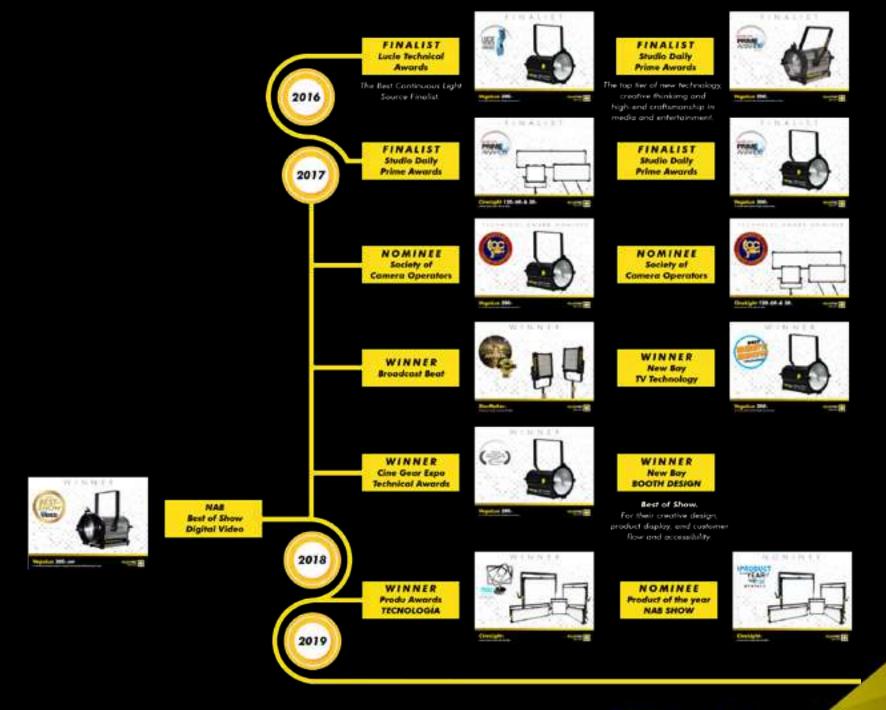





# FLUOTEC .

Luminaires and lighting fixtures for television studios, movie theaters and forums, newsrooms, video production studios, churches and places of worship and government facilities.





## Auralux100®

Daylight 5.5" StudioLED Fresnel Manual Zoom

- Daylight
- 5600 K
- 5.5" Lens
- · 103W
- 0.86 A @120 VAC
- · 13.29 lb
- DMX Dimmable Digital Control: 0%-100%
- Quiet operation
- Stepless CCT & Dimming Technology
- Code: G6LED172







Auralux100.

Daylight 5.5" StudioLED Fresnel Manual Zoom

#### **Photometric Data:**

Spot: 9° 26,806 lx (2,490 fc) @ 6 ft

Flood: 42° 2,435 lx (226 fc) @ 6 ft







### Auralux100®

Tungsten 5.5" StudioLED Fresnel Manual Zoom

- Tungsten
- 3200K
- · 5.5" Lens
- · 103W
- 0.86 A @120 VAC
- · 13.29 lb
- DMX Dimmable Digital Control: 0%-100%
- Quiet operation
- Stepless CCT & Dimming Technology
- Code: G6LED171







### Auralux100®

Tungsten 5.5" StudioLED Fresnel Manual Zoom

#### **Photometric Data:**

Spot: 9° 27,600 lx (2,564 fc) @ 6 ft

Flood: 42° 2,500 lx (232 fc) @ 6 ft







High-Performance Daylight 7" StudioLED Fresnel Motorized Zoom

- Daylight
- 5700K
- 7" Lens
- · 197W
- 1.64 A @120 VAC
- · 15.43 lb
- DMX Dimmable Digital Control: 0%-100%
- Quiet operation
- Stepless CCT & Dimming Technology
- Code: G6LED174







High-Performance Daylight 7" StudioLED Fresnel Motorized Zoom

#### **Photometric Data:**

Spot: 13° 41,300 lx (3,837 fc) @ 6 ft

Flood: 58° 3,676 lx (342 fc) @ 6 ft







High-Performance Tungsten 7" StudioLED Fresnel Motorized Zoom

- Tungsten
- 3100K
- · 7" Lens
- · 197W
- · 1.64 A @120 VAC
- · 15.43 lb
- DMX Dimmable Digital Control: 0%-100%
- Quiet operation
- Stepless CCT & Dimming Technology
- Code: G6LED173







High-Performance Tungsten 7" StudioLED Fresnel Motorized Zoom

#### **Photometric Data:**

Spot: 13° 42,254 lx (3,925 fc) @ 6 ft

Flood: 57° 3,271 lx (304 fc) @ 6 ft





Ultra High-Performance Daylight 8" StudioLED Fresnel Motorized Zoom

- Daylight
- 5700K
- 8" Premium Glass Lens
- · 197W
- 1.64 A @120 VAC
- · 15.87 lb
- DMX Dimmable Digital Control: 0%-100%
- Quiet operation
- Stepless CCT & Dimming Technology
- Code: G6LED176







Ultra High-Performance Daylight 8" StudioLED Fresnel Motorized Zoom

#### **Photometric Data:**

Spot: 13° 37,362 lx (3,471 fc) @ 6 ft

Flood: 54° 4,727 lx (439 fc) @ 6 ft





Ultra High-Performance Tungsten 8" StudioLED Fresnel Motorized Zoom

- Tungsten
- 3100K
- 8" Premium Glass Lens
- · 197W
- 1.64 A @120 VAC
- 15.87 lb
- DMX Dimmable Digital Control: 0%-100%
- Quiet operation
- Stepless CCT & Dimming Technology
- Code: G6LED175







Ultra High-Performance Tungsten 8" StudioLED Fresnel Motorized Zoom

#### **Photometric Data:**

Spot: 12° 34,088 lx (3,167 fc) @ 6 ft

Flood: 52° 4,243 lx (394 fc) @ 6 ft







Tunable 10" StudioLED Fresnel Motorized Zoom

- Tunable
- 3000K 5800K
- 10" Micro Prism Lens
- 338W
- 2.81 A @120 VAC
- · 26.23 lb
- DMX Dimmable Digital Control: 0%-100%
- Quiet operation
- Stepless CCT & Dimming Technology
- · Code: G6LED126







Tunable 10" StudioLED Fresnel Motorized Zoom

#### **Photometric Data:**

Spot: 15° 22,620 lx (2,101 fc) @ 6 ft

Flood: 50° 3,262 lx (303 fc) @ 6 ft









Daylight 10" StudioLED Fresnel Motorized Zoom

- Daylight
- 5700K
- 10" Premium Glass Lens
- 197W
- · 1.64 A @120 VAC
- · 26.23 lb
- DMX Dimmable Digital Control: 0%-100%
- Quiet operation
- Stepless CCT & Dimming Technology
- · Code: G6LED178









Daylight 10" StudioLED Fresnel Motorized Zoom

#### **Photometric Data:**

Spot: 10° 46,474 lx (4,318 fc) @ 6 ft

Flood: 47° 5,644 lx (524 fc) @ 6 ft







Tungsten 10" StudioLED Fresnel Motorized Zoom

- Tungsten
- 3100K
- 10" Premium Glass Lens
- · 197W
- 1.64 A @120 VAC
- · 26.23 lb
- DMX Dimmable Digital Control: 0%-100%
- Quiet operation
- Stepless CCT & Dimming Technology
- Code: G6LED177







Tungsten 10" StudioLED Fresnel Motorized Zoom

#### **Photometric Data:**

Spot: 10° 41,300 lx (3,837 fc) @ 6 ft

Flood: 47° 4,910 lx (456 fc) @ 6 ft







High-Performance Tunable DMX StudioLED PANELS

- Tunable
- 2700K 6200K
- · 163W
- 1.3 A @120 VAC
- 17.85 lb
- 3 Channel DMX Dimmable: 0%-100%
- Stepless CCT & Dimming Technology
- Code: G6LED203







High-Performance Tunable DMX StudioLED PANELS

#### **Photometric Data:**

Dispersion Angle: 48°

2,846 lx (264 fc) @ 6 ft

1,269 lx (118 fc) @ 9 ft

711 lx (66 fc) @ 12 ft



#### High-Performance Daylight DMX StudioLED PANELS

- Daylight
- 6200K
- 163W
- 1.3 A @120 VAC
- 17.85 lb
- 2 Channel DMX Dimmable: 0%-100%
- Stepless CCT & Dimming Technology
- Code: G6LED209







High-Performance Daylight DMX StudioLED PANELS

#### **Photometric Data:**

Dispersion Angle: 43°

1,541 lx (143 fc) @ 6 ft

687 lx (64 fc) @ 9 ft

385 lx (36 fc) @ 12 ft



#### High-Performance Tungsten DMX StudioLED PANELS

- Tungsten
- 2700K
- 163W
- 1.3 A @120 VAC
- 17.85 lb
- 2 Channel DMX Dimmable: 0%-100%
- Stepless CCT & Dimming Technology
- Code: G6LED206







High-Performance Tungsten DMX StudioLED PANELS

#### **Photometric Data:**

Dispersion Angle: 43°

1,444 lx (134 fc) @ 6 ft

644 lx (60 fc) @ 9 ft

361 lx (34 fc) @ 12 ft







High-Performance Tunable DMX StudioLED PANELS

- Tunable
- 2700K 6200K
- . 110W
- 0.94 A @120 VAC
- · 14.33 lb
- 3 Channel DMX Dimmable: 0%-100%
- Stepless CCT & Dimming Technology
- Code: G6LED202







High-Performance Tunable DMX StudioLED PANELS

#### **Photometric Data:**

Dispersion Angle: 45°

1,920 lx (178 fc) @ 6 ft

856 lx (80 fc) @ 9 ft

480 lx (45 fc) @ 12 ft







High-Performance Daylight DMX StudioLED PANELS

- Daylight
- 6200K
- 110W
- 0.94 A @120 VAC
- 14.33 lb
- 2 Channel DMX Dimmable: 0%-100%
- Stepless CCT & Dimming Technology
- Code: G6LED208







High-Performance Daylight DMX StudioLED PANELS

#### **Photometric Data:**

Dispersion Angle: 45°

1,040 lx (97 fc) @ 6 ft

464 lx (43 fc) @ 9 ft

260 lx (24 fc) @ 12 ft







High-Performance Tungsten DMX StudioLED PANELS

- Tungsten
- · 2700K
- · 110W
- 0.94 A @120 VAC
- · 14.33 lb
- 2 Channel DMX Dimmable: 0%-100%
- Stepless CCT & Dimming Technology
- Code: G6LED205







High-Performance Tungsten DMX StudioLED PANELS

#### **Photometric Data:**

Dispersion Angle: 45°

975 lx (91 fc) @ 6 ft

435 lx (40 fc) @ 9 ft

244 lx (23 fc) @ 12 ft







High-Performance Tunable DMX StudioLED PANELS

- Tunable
- 2700K 6200K
- . 66W
- 0.56 A @120 VAC
- 10.36 lb
- 3 Channel DMX Dimmable: 0%-100%
- Stepless CCT & Dimming Technology
- Code: G6LED201







High-Performance Tunable DMX StudioLED PANELS

#### **Photometric Data:**

Dispersion Angle: 45°

1,360 lx (126 fc) @ 6 ft

607 lx (56 fc) @ 9 ft

340 lx (32 fc) @ 12 ft



High-Performance Daylight DMX StudioLED PANELS

- Daylight
- 6200K
- 66W
- 0.56 A @120 VAC
- 10.36 lb
- 2 Channel DMX Dimmable: 0%-100%
- Stepless CCT & Dimming Technology
- Code: G6LED207







High-Performance Daylight DMX StudioLED PANELS

### **Photometric Data:**

Dispersion Angle: 45°

734 lx (68 fc) @ 6 ft

327 lx (30 fc) @ 9 ft

184 lx (17 fc) @ 12 ft







High-Performance Tungsten DMX StudioLED PANELS

- Tungsten
- 2700K
- . 66W
- 0.56 A @120 VAC
- 10.36 lb
- 2 Channel DMX Dimmable: 0%-100%
- Stepless CCT & Dimming Technology
- Code: G6LED204







High-Performance Tungsten DMX StudioLED PANELS

#### **Photometric Data:**

Dispersion Angle: 45°

683 lx (63 fc) @ 6 ft

305 lx (28 fc) @ 9 ft

171 lx (16 fc) @ 12 ft







### Diffusion for StudioLED PANELS®



- The powerful and practical solution for soft lights
- with NEBULA® Diffusion Technology
- light control accessories for StudioLED PANELS.
- Diffusion for StudioLED 650® HP: G6LED222
- Diffusion for StudioLED 450® HP: G6LED221
- Diffusion for StudioLED 250® HP: G6LED220







## CineLight 480 Super Quad.

Tunable Interchangeable Diffusion Long Throw LED PANEL

- Tunable
- 2600 K 6100 K
- 835 W
- 7.03 A @120 VAC
- · 25.35 lb
- Constant Output Pure White Light
- Digital Dimmer 0%-100%
- Stepless CCT & Dimming Technology
- Code with Yoke: G6LCNT220







## CineLight 480 Super Quad.

Tunable Interchangeable Diffusion Long Throw LED PANEL



Without Interchangeable Diffusion Panel

Dispersion Angle X: 46°

19,469 lx (1,809 fc) @ 6 ft

With Interchangeable Diffusion Panel

Dispersion Angle X: 69°

5,560 lx (517 fc) @ 6 ft







### CineLight Studio 120 Quad<sub>®</sub>



Tunable Interchangeable Diffusion Long Throw LED PANEL

- Tunable
- 2700K 6600K
- · 213W
- 1.79 A @120 VAC
- 25.35 lb
- Constant Output Pure White Light
- Digital Dimmer 0%-100%
- Stepless CCT & Dimming Technology
- Code with Yoke: G6LCNT113
- Code with Stand Mounting Bracket: G6LCNT115







### CineLight Studio 120 Quad.



Tunable Interchangeable Diffusion Long Throw LED PANEL

### **Photometric Data:**

Without Interchangeable Diffusion Panel

Dispersion Angle X: 45°

3,887 lx (361 fc) @ 6 ft

With Interchangeable Diffusion Panel

Dispersion Angle X: 70°

1,500 lx (139 fc) @ 6 ft







### CineLight Studio 120 Quad<sub>®</sub>



Tunable Interchangeable Diffusion Long Throw LED PANEL with Yoke

- Flightcase with handle and wheels
- Interchangeable Diffusion Panel
- Gel frame
- C-Clamp
- Safety cable
- 16 ft long Powercon AC cable without switch
- Stand mounting spigot 5/8"
- G6LCNT203







### CineLight Studio 120 Quad<sub>®</sub>



Tunable Interchangeable Diffusion Long Throw LED PANEL with Stand Mounting Bracket

- Flightcase with handle and wheels
- Gel frame
- Stand Mounting Bracket
- 16 ft long Powercon AC cable
- G6LCNT205







Tunable Interchangeable Diffusion Long Throw LED PANEL

- Tunable
- 2700K 6600K
- 213W 90-240V
- · 21.5 lb
- DMX Dimmable
- Digital Dimmer 0%-100%
- Stepless CCT & Dimming Technology
- Code with Yoke: G6LCNT105
- Code with Stand Mounting Bracket: G6LCNT129







Tunable Interchangeable Diffusion Long Throw LED PANEL

### **Photometric Data:**

Without Interchangeable Diffusion Panel


Dispersion Angle X: 45°

3,887 lx (361 fc) @ 6 ft

With Interchangeable Diffusion Panel

Dispersion Angle X: 70°

1,500 lx (139 fc) @ 6 ft

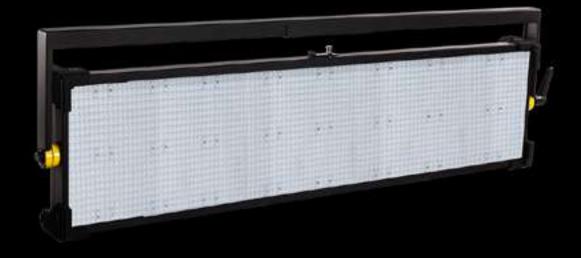






Tunable Interchangeable Diffusion Long Throw LED PANEL with Yoke

- Flightcase with handle and wheels (Dims.: 141.3 x 40.3 x 29.5 cm)
- Interchangeable Diffusion Panel
- Barndoor
- Gel frame
- C-Clamp
- Safety cable
- 16 ft long Powercon AC cable without switch
- Stand mounting spigot 5/8"
- G6LCNT204









Tunable Interchangeable Diffusion Long Throw LED PANEL with Stand Mounting Bracket

- Flightcase with handle and wheels (Dims.: 141.3 x 40.3 x 29.5 cm)
- Barndoor
- Gel frame
- Stand Mounting Bracket
- 16 ft long Powercon AC cable
- G6LCNT206







Tunable Interchangeable Diffusion Long Throw LED PANEL

- Tunable
- 2700K 6600K
- · 109W
- 0.91 A @120 VAC
- 15.43 lb
- Constant Output Pure White Light
- Digital Dimmer 0%-100%
- Stepless CCT & Dimming Technology
- Code with Yoke: G6LCNT106
- Code with Stand Mounting Bracket: G6LCNT130







Tunable Interchangeable Diffusion Long Throw LED PANEL

### **Photometric Data:**

Without Interchangeable Diffusion Panel

Dispersion Angle X: 45°

2,073 lx (193 fc) @ 6 ft

With Interchangeable Diffusion Panel

Dispersion Angle X: 70°

800 lx (74 fc) @ 6 ft









Tunable Interchangeable Diffusion Long Throw LED PANEL with Yoke

- Flightcase with handle and wheels (Dims.: 85.5 x 40.3 x 29.5 cm)
- Interchangeable Diffusion Panel
- Barndoor
- Gel frame
- C-Clamp
- Safety cable
- 16 ft long Powercon AC cable without switch
- Stand mounting spigot 5/8"
- G6LCNT207










Tunable Interchangeable Diffusion Long Throw LED PANEL with Stand Mounting Bracket

- Flightcase with handle and wheels (Dims.: 85.5 x 40.3 x 29.5 cm)
- Barndoor
- Gel frame
- Stand Mounting Bracket
- 16 ft long Powercon AC cable
- G6LCNT208

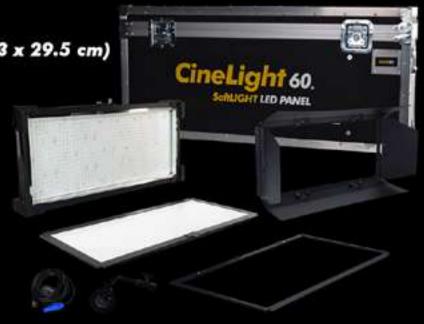





### Tunable Interchangeable Diffusion Long Throw LED PANEL

- Tunable
- 2700K 6600K
- 57W
- 0.48 A @120 VAC
- . 10 lb
- Constant Output Pure White Light
- Digital Dimmer 0%-100%
- Stepless CCT & Dimming Technology
- Code AC only: G6LCNT107
- Code V-Mount: G6LCNT108
- Code Gold-Mount: G6LCNT109







Tunable Interchangeable Diffusion Long Throw LED PANEL

### **Photometric Data:**

Without Interchangeable Diffusion Panel

Dispersion Angle X: 45°

1,078 lx (100 fc) @ 6 ft

With Interchangeable Diffusion Panel

Dispersion Angle X: 70°

416 lx (39 fc) @ 6 ft









Tunable Interchangeable Diffusion Long Throw LED PANEL • V-Mount Battery Plate

- Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)
- 1 CineLight 30 V-Mount
- 1 Interchangeable Diffusion Panel
- 1 Tripod
- 1 Gel frame
- 1 16 ft long Powercon AC cable with switch
- 1 Stand mount spigot mini
- G6LCNT172










Tunable Interchangeable Diffusion Long Throw LED PANEL • V-Mount Battery Plate

- Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)
- 2 CineLight 30 V-Mount
- 2 Interchangeable Diffusion Panels
- 2 Tripods
- 2 Gel frames
- 2 16 ft long Powercon AC cables with switch
- 2 Stands mount spigot mini
- **G6LCNT173**

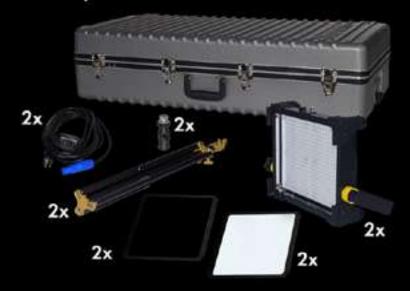







Tunable Interchangeable Diffusion Long Throw LED PANEL • V-Mount Battery Plate

- 1 Cargo case heavy duty with handle and wheels (Dims.: 58 x 106 x 19 cm)
- 3 CineLight 30 V-Mount
- 3 Interchangeable Diffusion Panels
- 3 Tripods
- 3 Gel frames
- 3 16 ft long Powercon AC cables with switch
- 3 Stands mount spigot mini
- G6LCNT174









Tunable Interchangeable Diffusion Long Throw LED PANEL • Gold-Mount Battery Plate

- Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)
- 1 CineLight 30 Gold-Mount
- 1 Interchangeable Diffusion Panel
- 1 Tripod
- 1 Gel frame
- 1 50° Egg crate degree light control grid
- 1 16 ft long Powercon AC cable with switch
- 1 Stand mount spigot mini
- G6LCNT175










Tunable Interchangeable Diffusion Long Throw LED PANEL • Gold-Mount Battery Plate

- Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)
- 2 CineLight 30 Gold-Mount
- 2 Interchangeable Diffusion Panels
- 2 Tripods
- 2 Gel frames
- 2 16 ft long Powercon AC cables with switch
- 2 Stands mount spigot mini
- G6LCNT176

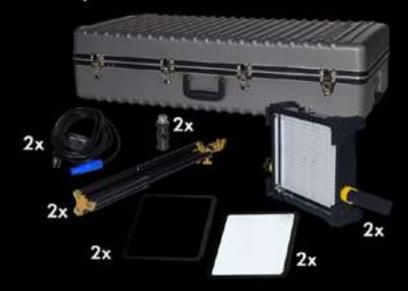







Tunable Interchangeable Diffusion Long Throw LED PANEL • Gold-Mount Battery Plate

- 1 Cargo case heavy duty with handle and wheels (Dims.: 58 x 106 x 19 cm)
- 3 CineLight 30 Gold-Mount
- 3 Interchangeable Diffusion Panels
- 3 Tripods
- 3 Gel frames
- 3 16 ft long Powercon AC cables with switch
- 3 Stands mount spigot mini
- G6LCNT177







### CineLight Production 120 Quad<sub>®</sub>




Tunable Fixed Diffusion SoftLIGHT LED PANEL

- Tunable
- 2700K 6600K
- · 213W
- 1.79 A @120 VAC
- · 24.25 lb
- Constant Output Pure White Light
- Digital Dimmer 0%-100%
- Stepless CCT & Dimming Technology
- Code with Yoke: G6LCNT112
- Code with Stand Mounting Bracket: G6LCNT114







### CineLight Production 120 Quad<sub>®</sub>



Tunable Fixed Diffusion SoftLIGHT LED PANEL

#### **Photometric Data:**

Dispersion Angle X: 70°


1,500 lx (139 fc) @ 6 ft

669 lx (62 fc) @ 9 ft

375 lx (35 fc) @ 12 ft







### CineLight Production 120 Quad Quad Quad Quad



Tunable Fixed Diffusion SoftLIGHT LED PANEL with Yoke

- Flightcase with handle and wheels
- Gel frame
- C-Clamp
- Safety cable
- 16 ft long Powercon AC cable
- Stand mounting spigot 5/8"
- · G6LED201







### CineLight Production 120 Quad<sub>®</sub>



Tunable Fixed Diffusion SoftLIGHT LED PANEL with Stand Mounting Bracket

- Flightcase with handle and wheels
- Gel frame
- Stand Mounting Bracket
- 16 ft long Powercon AC cable
- G6LCNT202







### CineLight Production 120<sub>®</sub>

Tunable Fixed Diffusion SoftLIGHT LED PANEL

- Tunable
- 2700K 6600K
- · 213W
- 1.79 A @120 VAC
- · 21.5 lb
- Constant Output Pure White Light
- Digital Dimmer 0%-100%
- Stepless CCT & Dimming Technology
- Code with Yoke: G6LCNT100
- Code with Stand Mounting Bracket: G6LCNT110







### CineLight Production 120<sub>®</sub>

Tunable Fixed Diffusion SoftLIGHT LED PANEL

#### **Photometric Data:**

Dispersion Angle X: 70°

1,500 lx (139 fc) @ 6 ft

669 lx (62 fc) @ 9 ft

375 lx (35 fc) @ 12 ft





### CineLight Production 120®



**Tunable Fixed Diffusion SoftLIGHT LED PANEL with Yoke** 

- Flightcase with handle and wheels (Dims.: 141.3 x 40.3 x 29.5 cm)
- Barndooor
- Gel frame
- 50° Egg crate degree light control grid
- C-Clamp
- Safety cable
- 16 ft long Powercon AC cable without switch
- Stand mounting spigot 5/8"
- G6CNT119







### CineLight Production 120<sub>®</sub>



Tunable Fixed Diffusion SoftLIGHT LED PANEL with Stand Mounting Bracket

- Flightcase with handle and wheels (Dims.: 141.3 x 40.3 x 29.5 cm)
- Barndooor
- Gel frame
- 50° Egg crate degree light control grid
- C-Clamp
- Safety cable
- 16 ft long Powercon AC cable without switch
- Stand mounting bracket
- G6CNT116








Tunable Fixed Diffusion SoftLIGHT LED PANEL

- Tunable
- 2700K 6600K
- · 109W
- 0.91 A @120 VAC
- · 15.43 lb
- Constant Output Pure White Light
- Digital Dimmer 0%-100%
- Stepless CCT & Dimming Technology
- Code with Yoke: G6LCNT101
- Code with Stand Mounting Bracket: G6LCNT111

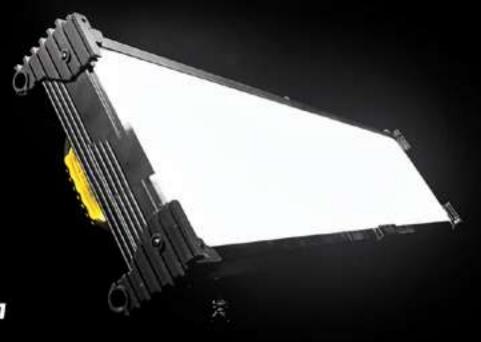





Tunable Fixed Diffusion SoftLIGHT LED PANEL


### **Photometric Data:**

Dispersion Angle X: 70°

800 lx (74 fc) @ 6 ft

357 lx (33 fc) @ 9 ft

200 lx (19 fc) @ 12 ft

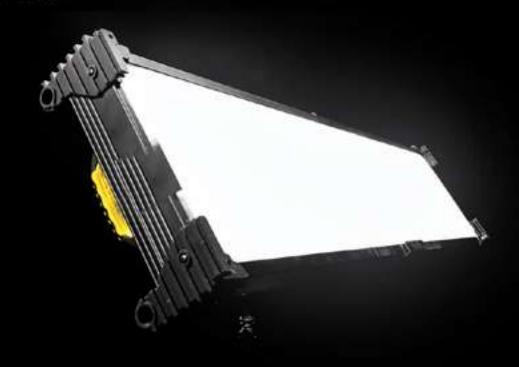







**Tunable Fixed Diffusion SoftLIGHT LED PANEL with Yoke** 

- Flightcase with handle and wheels (Dims.: 85.5 x 40.3 x 29.5 cm)
- Barndooor
- Gel frame
- 50° Egg crate degree light control grid
- C-Clamp
- Safety cable
- 16 ft long Powercon AC cable
- Stand mounting spigot 5/8"
- G6CNT120









Tunable Fixed Diffusion SoftLIGHT LED PANEL with Stand Mounting Bracket

- Flightcase with handle and wheels (Dims.: 85.5 x 40.3 x 29.5 cm)
- Barndooor
- Gel frame
- 50° Egg crate degree light control grid
- 16 ft long Powercon AC cable without switch
- Stand mounting bracket
- G6CNT118







Tunable Fixed Diffusion SoftLIGHT LED PANEL

- Tunable
- 2700K 6600K
- 57W
- 0.48 A @120 VAC
- · 10 lb
- Constant Output Pure White Light
- Digital Dimmer 0%-100%
- Stepless CCT & Dimming Technology
- Code AC only: G6LCNT102
- Code V-Mount: G6LCNT103
- Code Gold-Mount: G6LCNT104







Tunable Fixed Diffusion SoftLIGHT LED PANEL

### **Photometric Data:**

Dispersion Angle X: 70°

416 lx (39 fc) @ 6 ft

186 lx (17 fc) @ 9 ft

104 lx (10 fc) @ 12 ft







Tunable Fixed Diffusion SoftLIGHT LED PANEL • V-Mount Battery Plate

- Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)
- 1 CineLight 30 V-Mount
- 1 Tripod
- 1 Gel frame
- 1 50° Egg crate degree light control grid
- 1 16 ft long Powercon AC cable with switch
- 1 Stand mount spigot mini
- G6LCNT163









Tunable Fixed Diffusion SoftLIGHT LED PANEL • V-Mount Battery Plate

- Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)
- 2 CineLight 30 V-Mount
- 2 Tripods
- 2 Gel frames
- 2 50° Egg crate degree light control grids
- 2 16 ft long Powercon AC cables with switch
- 2 Stands mount spigot mini
- G6LCNT164









Tunable Fixed Diffusion SoftLIGHT LED PANEL • V-Mount Battery Plate

- 1 Cargo case heavy duty with handle and wheels (Dims.: 58 x 106 x 19 cm)
- 3 CineLight 30 V-Mount
- 3 Tripods
- 3 Gel frames
- 3 50° Egg crate degree light control grids
- 3 16 ft long Powercon AC cables with switch
- 3 Stands mount spigot mini
- G6LCNT165









Tunable Fixed Diffusion SoftLIGHT LED PANEL • Gold-Mount Battery Plate

- Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)
- 1 CineLight 30 Gold-Mount
- 1 Tripod
- 1 Gel frame
- 1 50° Egg crate degree light control grid
- 1 16 ft long Powercon AC cable with switch
- 1 Stand mount spigot mini
- G6LCNT166







### CineLight Production 30<sub>®</sub>




Tunable Fixed Diffusion SoftLIGHT LED PANEL • Gold-Mount Battery Plate

- Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)
- 2 CineLight 30 Gold-Mount
- 2 Tripods
- 2 Gel frames
- 2 50° Egg crates degree light control grid
- 2 16 ft long Powercon AC cables with switch
- 2 Stands mount spigot mini
- G6LCNT167









Tunable Fixed Diffusion SoftLIGHT LED PANEL • Gold-Mount Battery Plate

- 1 Cargo case heavy duty with handle and wheels (Dims.: 58 x 106 x 19 cm)
- 3 CineLight 30 Gold-Mount
- 3 Tripods
- 3 Gel frames
- 3 50° Egg crates degree light control grid
- 3 16 ft long Powercon AC cables with switch
- · 3 Stands mount spigot mini
- G6LCNT168







### Tunable Interchangeable Diffusion Full Waterproof LED PANEL

- Tunable
- 2700K 6200K
- · 66W
- 0.56 A @120 VAC
- · 10.6 lb
- Constant Output Pure White Light
- Digital Dimmer 0%-100%
- Stepless CCT & Dimming Technology
- Code V-Mount: G6LED190
- Code Gold-Mount: G6LED191







Tunable Interchangeable Diffusion Full Waterproof LED PANEL

### **Photometric Data:**

Dispersion Angle X: 45°

1,360 lx (126 fc) @ 6 ft

607 lx (56 fc) @ 9 ft

340 lx (32 fc) @ 12 ft





Tunable Interchangeable Diffusion Full Waterproof LED PANEL•V-Mount Battery Plate

- Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)
- 1 StarMaker HP V-Mount
- 1 Interchangeable Diffusion Panel
- 1 Tripod
- 1 Gel frame
- 1 16 ft long Powercon AC cable with switch
- 1 Stand mount spigot mini
- G6LED192










### Tunable Interchangeable Diffusion Full Waterproof LED PANEL•V-Mount Battery Plate

- Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)
- 2 StarMaker HP V-Mount
- 2 Interchangeable Diffusion Panels
- 2 Tripods
- 2 Gel frames
- 2 16 ft long Powercon AC cables with switch
- 2 Stands mount spigot mini
- G6LED193

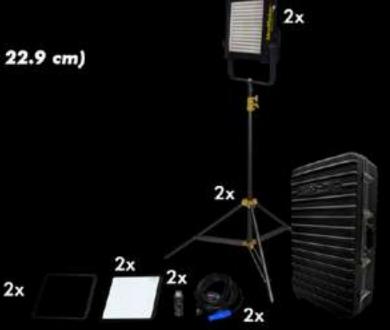







Tunable Interchangeable Diffusion Full Waterproof LED PANEL•V-Mount Battery Plate

- Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)
- 3 StarMaker HP V-Mount
- 3 Interchangeable Diffusion Panels
- 3 Tripods
- 3 Gel frames
- 3 16 ft long Powercon AC cables with switch
- 3 Stands mount spigot mini
- G6LED194









Tunable Interchangeable Diffusion Full Waterproof LED PANEL Gold-Mount Battery Plate

- Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)
- 1 StarMaker HP Gold-Mount
- 1 Interchangeable Diffusion Panel
- 1 Tripod
- 1 Gel frame
- 1 16 ft long Powercon AC cable with switch
- 1 Stand mount spigot mini
- G6LED195










Tunable Interchangeable Diffusion Full Waterproof LED PANEL • Gold-Mount Battery Plate

#### Includes:

- Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)
- 2 StarMaker HP Gold-Mount
- 2 Interchangeable Diffusion Panels
- 2 Tripods
- 2 Gel frames
- 2 16 ft long Powercon AC cables with switch
- 2 Stands mount spigot mini
- G6LED196








2x



Tunable Interchangeable Diffusion Full Waterproof LED PANEL • Gold-Mount Battery Plate

- Travelcase with handle and wheels (Dims.: 95.2 x 45 x 22.9 cm)
- 3 StarMaker HP Gold-Mount
- 3 Interchangeable Diffusion Panels
- 3 Tripods
- 3 Gel frames
- 3 16 ft long Powercon AC cables with switch
- 3 Stands mount spigot mini
- G6LED197

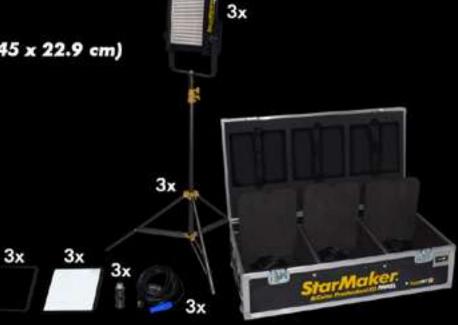





**FLUOTEC**® leader in design and manufacture of lighting for television, video and photography.

