



TONS OF LIGHTING

VegaLux 300 HP®

8" TUNABLE BICOLOR DMX STUDIOLED FRESNEL


BY **FLUOTEC**



Tunable Pure White Light



www.fluotec.com · info@fluotec.com




Vega Lux 300 HP[®] Bicolor

8" TUNABLE BICOLOR DMX STUDIO LED FRESNEL



Vega Lux 300 HD[®] Bicolor

With Yoke	G6LED300
With Pole Operated Yoke	G6LED310
AC input	90-240V - 50/60Hz
Weight lb/kg	22.2 lb / 10 kg
Energy efficiency	2.89A (346W) @ 120VAC 1.44A (346W) @ 240VAC
CCT	3,000 K - 5,600 K
CRI	≥ 95
Remote dimming	Via DMX 0% - 100%
Local dimming	Digital LCD Display 0% - 100%

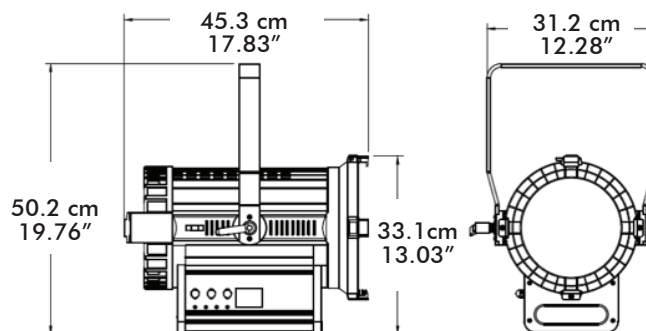

Photometric Data

VegaLux 300 HP[®] Bicolor

	1.83m (6ft)	2.74m (9ft)	3.66m (12ft)	
Warm White 3200 K				
Flood	10,900	4,862	2,725	lx
Spot	27,100	12,088	6,775	lx
Spot	2,518	1,123	629	fc
Flood	1,013	452	253	fc
Neutral White 4400 K				
Flood	12,500	5,576	3,125	lx
Spot	38,700	17,263	9,675	lx
Spot	3,595	1,604	899	fc
Flood	1,161	518	290	fc
Cool White 5600 K				
Flood	13,200	5,888	3,300	lx
Spot	40,400	18,021	10,100	lx
Spot	3,753	1,674	938	fc
Flood	1,226	547	307	fc

Key Features

- Universal power supply: 90-240V - 50/60Hz.
- DMX controlled motorized zoom with a 16° to 55° field range.
- Local and DMX controlled 0-100% dimming.
- Four dimming curves.
- 3000K to 5600K continuously variable CCT.
- 5/9 DMX channels.
- 8" Diameter micro prism lens.
- 24 KHz flicker free high refresh rate.
- Adjustable fan speed.
- IP20 rating.
- -20°C - 40°C working temperature.
- Aluminum housing.

Accessories



G6LED127
8 Leaf barndoor



G6FLT059
Safety cable (2)



G6LED128
Gel frame



G6CNT154
AC Cord with
powercon connector
16 ft (4.82 m)



G6FLT262
C-clamp



G6FLT057
Stand mount spigot
5/8"

More Info: www.fluotec.com · info@fluotec.com ·